


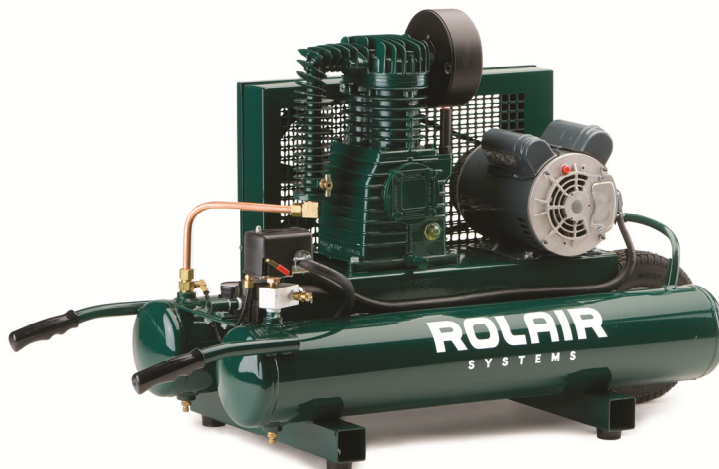

ROLAIR® STANDARD FEATURES

PUMP: ROLAIR® Quality, Heavy Duty, Single Stage, Ball Bearings, Cast-Iron Twin-Cylinders, Hardened-Steel Valve Plates with Swedish Lamellar Reed Valves, Aluminum Alloy Connecting Rods with Automotive-Style Inserts, Multi-Finned 11" Flywheel, Oil Sight Gauge and Splash Lubrication.

MOTOR: 2 HP 1740 RPM Open Drip-Proof
115/230 Dual-Voltage Switch
Overload Protected with Manual Reset
S-1 Rated for Continuous Duty

TANK ASSEMBLY: Non-Code, 9 Gallons

WHEELS: One 410/350 x 4 Flat-Free Tire

PERFORMANCE @ 90 PSI:

Cu. Ft. Displaced - 12.5

Cu. Ft. Delivered - 8.8

DIMENSIONS:

L46" x W19" x H28"

APPROXIMATE SHIPPING WEIGHT:

174 lb.

STANDARD EQUIPMENT

- Industrial "Square D" Pressure Switch with Relief Valve
- Intake Filter with Silencer and Replaceable Element
- Universal Quick-Disconnect Fitting
- Totally Enclosed Steel Belt Guard
- Accessory Support Bracket
- Pressure Gauge 0-200 in 5 lb. Graduations
- 110/135 PSI Operating Pressure
- Safety Relief Valve
- Air-Cooled Aftercooler

OPTIONAL EQUIPMENT

Constant-Speed Operation, Dual-Control Operation, Filter-Regulator-Lubricator Sets, 20-Gallon Tank