


BORA[®]

Speedhorse TRX Top Rail™


Slots are provided on the top, bottom and one face of the extrusion



Thick walls in the extrusion provide strength when clamping



Attach the top rails with sheet metal screws

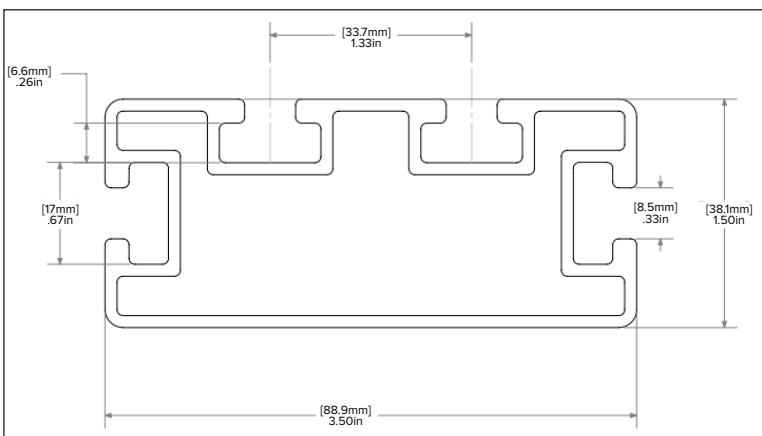

Quickly and easily build a worktable for your Speedhorse setup with the innovative and flexible TRX Rail system. The 39.7in (1m) aluminum extruded rail fits easily to your Speedhorse or Speedhorse XT with screws and provides channels along the top edge and the faces of the extrusion for clamping or jig installation. Couple the top rail with the PM-4560 TRX Rails and you have a professional setup base for a worktable in a matter of minutes. Once everything is in place add sheet material on top to complete your table setup. When the extrusions are installed the rail surfaces sit flush to the aluminum rail on top of the saw horse providing infinite possibilities for t-track aftermarket jigs, fixtures and clamps that are sold separately.

Visit www.boratool.com for more information.