



ROLAIR® STANDARD FEATURES

PUMP: Two Stage, Cast-Iron Cylinders, Aluminum Head and Crankcase for Faster Heat Dissipation, Ball Bearings, Splash Lubricated, Bearing Inserts on Connecting Rods, High - Efficiency Reed Valves, Low RPM's to Ensure Long Life and Trouble-Free Performance. **For Pump Specifications See Reverse Side**

TANK : Horizontal or Vertical
60, 80 or 120 Gallon - ASME

MOTOR: Open Drip-Proof
208/230 Volt – 60 Hz - 1800 RPM – 1 Phase
208/230/460 Volt–60 Hz-1800 RPM – 3 Phase

APPROXIMATE SHIPPING WEIGHT:

405 lb. - 60 Gallon Models
470 lb. - 80 Gallon Models
640 lb. - 120 Gallon Models


STANDARD EQUIPMENT

- Pressure Switch - Start/Stop Operation 145-175 PSI Settings, On/Off Switch
- Automatic Unloading Device for Loadless Starts
- Heavy-Duty Brass Shut-Off Valve
- Pressure Gauge - 0-300 PSI in 5 lb. Graduations
- Safety Relief Valve - ASME Approved
- V-Belt Drive
- Intake Filter/Silencer with Replaceable Element
- Totally-Enclosed Steel Belt Guard

OPTIONAL EQUIPMENT

Magnetic Starter, Automatic Tank Drain, Low-Oil Shutdown, Vibration Pads, 208 V Motor, Dual Controls, Head Unloader, Air-Cooled Aftercooler, Refrigerant Air Dryer, 3-Phase Motor

MODEL PMP22K28CH

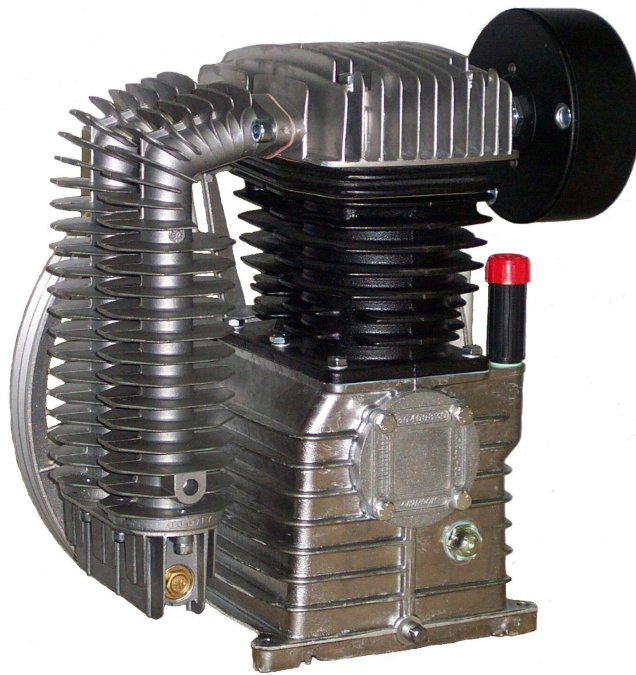

K28

SPECIFICATIONS

NO. OF CYLINDERS	CYLINDERS BORE & STROKE (inches)	OIL CAPACITY (oz.)	FWHL DIAMETER (inches)	DRY WEIGHT (lb.)	MAXIMUM PRESSURE
2	3.74 & 1.97 x 2.56	61	15.16	58	200 PSI

PERFORMANCE

HP	DISCHARGE PRESSURE	CFM DISPLACED	CFM DELIVERED @ 175 PSI	PUMP RPM
5	175 PSI	19.7	15.3	1180