

WGen3600DF



3600 Watt Open Frame

Dual Fuel (Gas/LPG) Portable Generator

Gas: 3600W Running 4650W Peak | Propane: 3240W Running 4180W Peak

Rugged roll bars for added strength and protection

Fuel gauge on top of 4 gal. gas tank



50 State and Canada Model

Push button electric start, lights up green when unit is on

Fuel selector switch allows to easily switch from gas to propane without shutting off the unit

Battery charging port (charger included)


Dependable 5.9 HP 212cc OHV 4-Stroke Westinghouse engine

Remote start key fob included for starting and stopping generator up to 109 yards away



RV and camper ready TT-30R outlet

Propane hook up (LPG hose included)

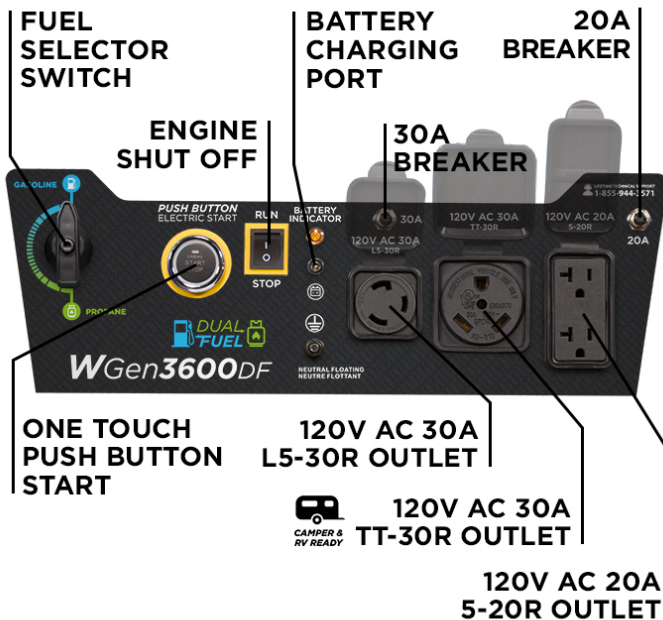

What Comes in the Box



Gasoline Running Watts	3600
Gasoline Peak Watts	4650
Gasoline Running Amps	30 amps
Gasoline Peak Amps	38 amps
Propane Running Watts	3240
Propane Peak Watts	4180
Propane Running Amps	27 amps
Propane Peak Amps	34.8 amps
AC Voltage	120 Volts
AC Frequency	60 Hz
Engine Horse Power (HP)	5.9 HP
Total Harmonic Distortion (THD)	<23%
Automatic Voltage Regulator (AVR)	Yes
Starting System	Electric, Remote, Recoil
Battery Included	Yes
Battery Charger Included	Yes
Remote Start Fob Included	Yes (factory paired)
Remote Start Distance (yards/meters)	109 yd. (100 m.)
Push Button Start	Yes
Mobile App Compatible	No
Engine Displacement	212cc
Engine Brand	Westinghouse
Engine Type	OHV 4 Stroke
Engine RPM	3600
Operational Volume (dBA)	69 dBA
Spark Plug (included)	Torch F7TC
Carburetor Kit Required to Operate at Altitude	Yes
Altitude Carburetor Kit Number (sold separate)	140543
DF Regulator Assembly (sold separate)	140560
Auto Idle Control	No
Built-in Inverter	No
Engine Lubrication	Splash
Recommended Oil	SAE 10W30
Oil Bottle Size (included)	.6 qt. (20.3 oz.)
Oil Capacity (Quarts/Ounces)	.6 qt. (20.3 oz.)
Low Oil Shutdown	Automatic
Fuel Type	Propane, Unleaded Gasoline, %10 Ethanol or less
Fuel Shut Off	Manual

Fuel Tank Capacity (Gallons/Liters)	4 gal. (15 L)
Gas - Run Time at %25 Load (hrs.)	18 hrs.
Gas - Run Time at %50 Load (hrs.)	13.5 hrs.
Gasoline Fuel Gauge	Yes
Choke type	Automatic
Choke Location	Above Air Filter
AC Outlets	(1) 120V 30A (TT-30R) (1) 120V 30A (L5-30R) (1) 120V 20A (A5-20R)
Ground	Floating Neutral
Covered Outlets	Yes
Transfer Switch Ready	No
Westinghouse Portable Transfer Switch Ready (ST Switch)	No
GFCI Outlets	No
VFT Data Center	No
RV Ready Outlet	Yes
Overload Protection (circuit breaker)	Yes
Handle Style	Single Handle with Foam Grip
Wheel Kit Included	Yes
Wheel Size	8 in. Diameter, 2 in. Wide
Wheel Type	Polyurethane
Frame Thickness in. (mm)	1 in. (25 mm)
Emissions	EPA, CARB
Canada CSA Compliant	Yes
Muffler	Pulse-Flo™
Spark Arrestor	Yes
Residential Warranty	3 Years or 1000 hrs
Commercial Warranty	6 Months or 1000 hrs
Assembled Length in. (mm)	23.3 in. (590 mm)
Assembled Width in. (mm)	22.8 in. (580 mm)
Assembled Height in. (mm)	21.3 in. (540 mm)
Extended Length in. (mm)	33.8 in. (858.52)
Carton Length in. (mm)	26.7 in. (678 mm)
Carton Width in. (mm)	19.6 in. (500 mm)
Carton Height in. (mm)	19.1 in. (485 mm)
Dry Unit Weight lb. (kg)	109 lb. (49.4 kg)
Shipping Weight lb. (kg)	114 lb. (52.7 kg)
UPC	855464003254
GTIN	00855464003254

09252017KD
 ©2017 Westinghouse Portable Power
 Specifications are subject to change without notice
 Westinghouse Portable Power
 777 Manor Park Dr., Columbus, OH 43228

**Have questions? Contact our team
 at service@wpowereq.com or call
 855.944.3571**



/wpowereq



/WestinghouseProducts



WestinghousePortablePower.com

