

1/3 HP DUAL CAST IRON SUMP PUMP SYSTEM

APPLICATIONS

Ideal for average- to high-volume water removal in residential spaces such as basements, laundry facilities, and crawl spaces. This system offers worry-free operation, providing you with a back-up pump and double the flow rate when needed.*

FEATURES & BENEFITS

- Dual automatic submersible sump pumps
- Pre-assembled piping and check valves included
- Maximum head of 25'
- 10' power cord
- 1-1/2" FNPT discharges
- Piggyback float switches
- Clog-resistant design (3/8" semi-solids handling)
- PSC motors




Model	Item No.	UPC	HP	Volts	Switch	Discharge	Cord Length	Operation	Gallons Per Hour at Height					Shut-Off	On/Off Levels	Min. Basin Diameter
									0'	5'	10'	15'	20'			
RL-SC33DUP	14942771	0 10121 14606 8	1/3	115	Vertical	1-1/2" FNPT	10'	Single Pump Dual Pump	3350 6000	3000 5400	2460 4425	1860 3345	960 1725	25'	On: 7.25" Off: 2.75"	18"

CARTON SPECIFICATIONS

Model	Length	Width	Height	Weight (lbs)	Carton Cubes (cu ft)	Pallet Quantity	Quantity per Layer	Layers per Pallet
RL-SC33DUP	9.5"	17.25"	14"	45	1.33	24	8	3

Single Pump vs. Dual Pump Operation

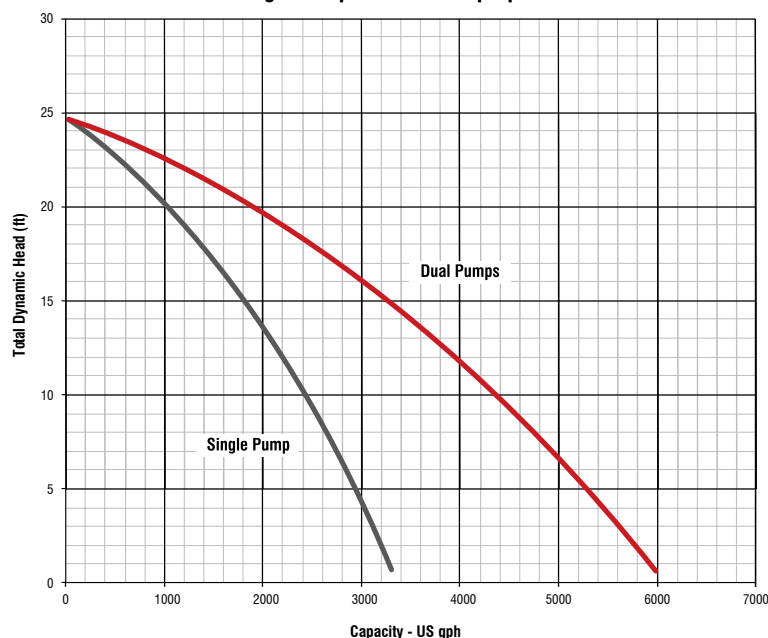

NOTE: Friction loss in pipe not included

